

# WS2A

Compact dual-driver subwoofer

## features

- ▶ Dedicated ultra-low frequency system
- ▶ Twin high efficiency 15" (380mm) transducers
- ▶ Extended response to 30Hz (-10dB)
- ▶ Multi-laminate birch plywood construction


## applications

- ▶ Theatre sub-bass
- ▶ Live sound reinforcement
- ▶ Nightclub system sub-bass

The WS2A is a dedicated subwoofer for use with Wavefront Series full-range enclosures in situations where ultra-low frequency enhancement and increased system headroom are required.

It will extend the power bandwidth of the complete system to below 35Hz and is capable of reproducing levels of deep bass normally associated with much larger enclosures.

## overall dimensions

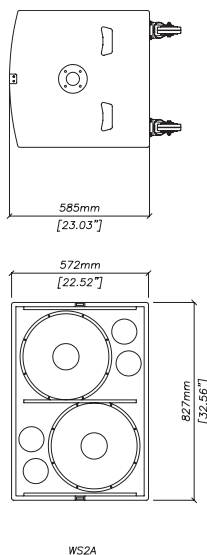

## technical specifications

TYPE	Compact sub-bass
FREQUENCY RESPONSE (1)	38Hz-100Hz $\pm$ 3dB -10dB @ 30Hz
DRIVERS	2 x 15" (380mm) / 4" (100mm) voice coil
RATED POWER (2)	800W AES, 3200 peak
RECOMMENDED AMPLIFIER	700-1200W into 4 ohms
SENSITIVITY (3)	99dB
MAXIMUM SPL (4)	126dB continuous, 132dB peak
NOMINAL IMPEDANCE	4 ohms
CROSSOVER	100Hz active
FINISH	Textured grey paint
PROTECTIVE GRILLE	Grey perforated steel
CONNECTORS	2 x Neutrik NL4
FITTINGS	4 x 4" (100mm) castors 1 x Mounting pole socket Lid clips
DIMENSIONS	(W) 572mm x (H) 827mm x (D) 585mm (W) 22.5ins x (H) 32.5ins x (D) 23ins
WEIGHT	60kg (132lbs)

Century Point, Halifax Road, Cressex Business Park,  
High Wycombe, Buckinghamshire HP12 3SL, England.  
Telephone: +44 (0)1494 535312 Facsimile: +44 (0)1494 438669  
E-mail: [info@martin-audio.com](mailto:info@martin-audio.com)  
All information is Copyright © 2003 Martin Audio Ltd.



[www.martin-audio.com](http://www.martin-audio.com)

touring and theatre